


## The Professionals' Choice For The Interior Restoration Of Historic Buildings

Until now, the redecoration of historic buildings has not been straightforward. Old lime-wash and distemper coated surfaces have been covered with water-based paints and emulsions because they are cheap, easy to apply and readily available.



The use of these coatings is a mistake. It is a waste of time and money.

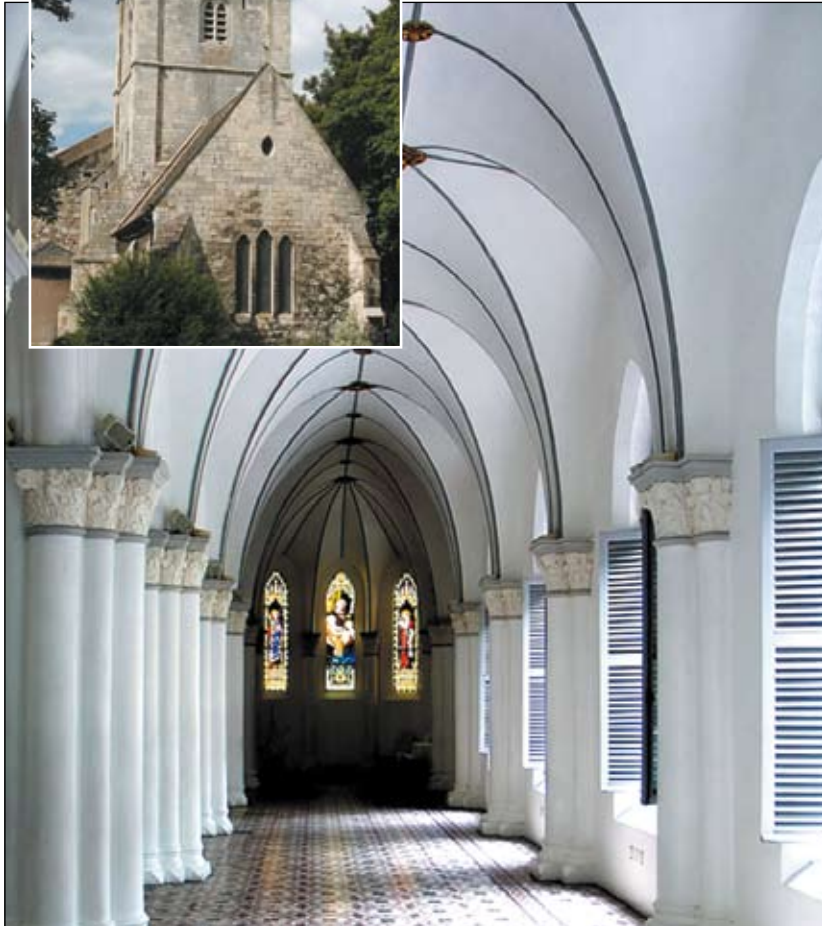

The solid walls of old and historic buildings contain a considerable amount of moisture. When standard emulsions and masonry coatings are applied, this moisture becomes trapped. Eventually, it forces its way out and causes the paint and plaster to flake and come away from the wall.

Benefits of using Elite Heritage Include:

- Zero tension film
- Stain covering properties
- Active mould resistance
- Rapid hardening
- Washable
- Non-yellowing
- Non saponifiable

### ELITE HERITAGE - The Solution..

ELITE HERITAGE - Unlike most other paints, Elite Heritage is permeable and allows water and moisture to pass through it - allowing the wall to breathe.

ELITE HERITAGE - Offers the traditional appearance of the original coatings with the added benefits of durability, ease of application and complete stain covering.

ELITE HERITAGE - Is ideal for use in historic buildings with highly decorative plaster-work. Its high-opacity stain-blocking properties mean that only a thin coat need be applied to the surface, ensuring that the surface detail doesn't become clogged, distorted and lost.



## General Description

Matt & Satin finish interior paint, solvent soluble.

Binder	:	Modified oils
Pigment	:	Rutile titanium dioxide (TiO <sub>2</sub> )
Solvent	:	Odour free aliphatic solvent

Elite Heritage can be applied without an undercoat, primer or sealer of any sort, directly onto coherent substrates stained with nicotine, soot or water marks.

Elite Heritage has been developed for use on the following substrates with the minimum preparation, self priming and complete dependability:

Soft distemper	Lime-wash	Chalking substrates	Old paint films
Dried water stains	Soot & fire residues	Textured finishes	Cold surfaces
Mortar	Stone	Wood	

Elite Heritage has zero tension, which means there is less of a chance of future flaking and peeling problems. This also helps when applying over old paint films.

Elite Heritage is 100% micro-porous. This allows vapour to pass through the surface, avoiding vapour pressure under the new paint film and prevents the accumulation of water. The freshly-coated substrate is therefore allowed to dry out.

Elite Heritage offers excellent stain covering properties: Smoke, soot, water and nicotine stains can all be completely covered without washing, priming or sealing. Two coats of Elite Heritage can cover almost any stain..

### Properties

**Viscosity;** *semi-gel.*

**Colour;** *white, but can easily be tinted.*

**Odour;** *odour free.*

**Transport;** *not subject to ADR/RID regulations.*

**Shelf life at 20°C;** *at least 1 year in tightly closed containers. Not affected by frost. Never skins over.*

**Packaging;** *15 litre*

### Results of standard tests

**Appearance;** *satin or matt finish.*

**Toxicity;** *non-toxic.*

**Fire rating;** *Class '0' B.S. 476 Part 6&7.*

**Specific gravity;** *1.40*

**Solids;** *68-69%*

**Consumption;** *approx. 11m<sup>2</sup>/litre or 8m<sup>2</sup>/kg.*

**Drying time;** *in normal conditions of temperature and humidity (at 20°C & 65%r.h.) dust free after 4 hours, second coat after 2 hours, total dry and hard after 14 days.*

### Instructions for application

**Condition of substrate;** *the substrate must be homogeneous, dry and free from mould.*

**Preparation of the substrate;** *not normally necessary; no need for any washing down, primer or undercoat.*

**Methods of application;** *by airless spray, brush and roller.*

**Dilution;** *low odour white spirit or white spirit.*

**Cleaning of tools & clothes;** *white spirit.*

**Tinting;** *up to 5% with high quality universal tinting paste (with some reservations).*

### System of application

*1 coat (depending on the condition of the substrate).*

*Before application & drying, foodstuffs which are not in closed containers must be covered.*

For more information, please contact:

LarkRise Coatings  
6 Bolton Grove, Seaton Carew,  
Hartlepool TS25 1BD  
Tel: 01429 291301  
Email: [info@paintedpast.co.uk](mailto:info@paintedpast.co.uk)  
Web: [www.paintedpast.co.uk](http://www.paintedpast.co.uk)